



# Test Report: DDRH-240-32

---

240W High Reliable 250~1500Vdc Ultra Wide Input DIN  
Rail Type DC-DC Converter

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST

## DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 32V~ 36V	I/P : 800 VDC O/P : MIN LOAD Ta : 25°C	28.104V~37.648 V/ 800 VDC
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: -1.5%~ +1.5%	I/P: 1500VDC / 250 VDC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.1905%~ 0.153%
3	LINE REGULATION (Max)	V1: -0.5%~+0.5 %	I/P: 1500VDC / 250 VDC O/P:FULL LOAD Ta:25°C	V1: 0%~ 0.153%
4	LOAD REGULATION (Max)	V1: -0.5%~+0.5 %	I/P: 800VDC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.1905%~0.1187 %
5	OVER/UNDERSHOOT TEST	< +5%	I/P: 800 VDC O/P:FULL LOAD Ta:25°C	TEST: 0.8%
6	RIPPLE & NOISE (Max)	VZ: 240mVp-p	I/P: 800 VDC O/P:FULL LOAD Ta:25°C	V1: 23mVp-p
		high frequency :	low frequency :	
7	DYNAMIC LOAD	V1: 3200 mVp-p	I/P: 800VDC O/P: (1)FULL /MIN LOAD 50%DUTY / 120HZ (2)FULL /MIN LOAD 50%DUTY / 1KHZ (3)FULL /MIN LOAD 50%DUTY / 500HZ (4)FULL /MIN LOAD 50%DUTY / 3KHZ (5)FULL /MIN LOAD 50%DUTY / 8KHZ (6)FULL /MIN LOAD 50%DUTY / 10KHZ	(1) 382mVp-p (2) 386mVp-p (3) 378mVp-p (4) 350mVp-p (5) 390mVp-p (6) 390mVp-p

				Ta:25°C	
		<p>FULL /50% LOAD 50%DUTY / 120HZ</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>	
		<p>FULL /50% LOAD 50%DUTY / 3KHZ</p>		<p>FULL /50% LOAD 50%DUTY / 500HZ</p>	
		<p>FULL /50% LOAD 50%DUTY / 10KHZ</p>		<p>FULL /50% LOAD 50%DUTY / 8KHZ</p>	
8	EXERNAL CAPACITANCE LOAD(Max.)	4000uF	I/P : 800VDC O/P : TESTING LOAD Ta : 25°C	TEST: <u>OK</u>	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	250VDC~ 1500 VDC	I/P: TESTING O/P: FULL LOAD Ta:25°C	238.6V~ 1400 V/FULL LOAD 238.6V~ 1500 V/80% LOAD 238.6V~ 1500 V/40% LOAD




240W High Reliable 250~1500Vdc Ultra Wide  
Input DIN Rail Type DC-DC Converter

DDRH-240 series

			<p>I/P: LOW-LINE-0.2= 249.8 V HIGH-LINE+3V= 1503 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN ( POWER ON/OFF NO DAMAGE )</p>	TEST: <u>OK</u>
2	EFFICIENCY(TYP)	<p>87%/300VDC 90%/800VDC 86%/1500VDC</p>	<p>I/P: 300VDC ( 80% LOAD ) I/P: 800VDC I/P: 1500VDC ( 80% LOAD ) O/P:FULL LOAD Ta:25°C</p>	<p>90.05%/300VDC 91.28%/800VDC 87.93%/1500VDC</p>
3	INRUSH CURRENT(TYP)	<p>120A/300VDC 300A/800VDC 500A/1500VDC COLD START</p>	<p>I/P: 300VDC ( 80% LOAD ) I/P: 800VDC I/P: 1500VDC ( 80% LOAD ) O/P:FULL LOAD Ta:25°C</p>	<p>I = 23.75A/ 300VDC I = 61.9A/ 800VDC I = 121A/ 1500VDC</p>


INPUT=300VDC @ TEST LOAD

CH2 : DC Input Voltage CH4 : Input current

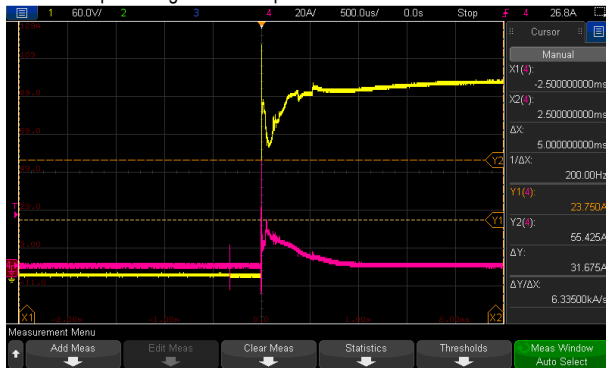


INPUT=800VDC @ FULL LOAD

CH2 :DC Input Voltage CH4 : Input current

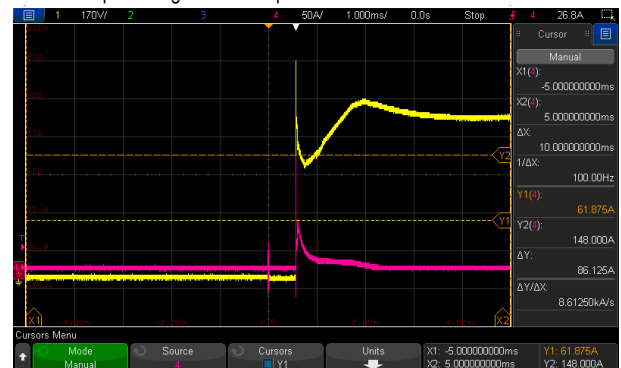

INPUT=1500VDC @ TEST LOAD

CH2 : DC Input Voltage CH4 : Input current

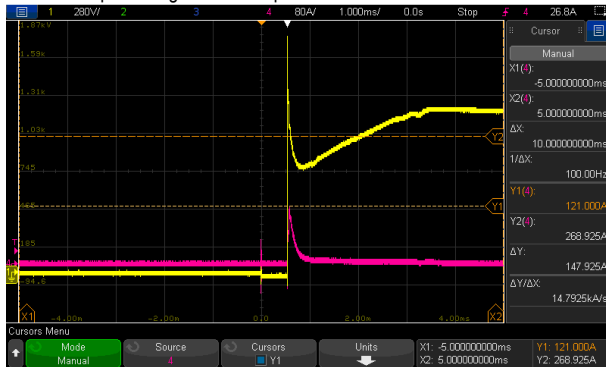

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	<p>105 %~ 135% RATED OUTPUT POWER Protection type : Hiccup mode when output voltage&lt;35%, recovers automatically after</p>	<p>I/P: 1400 VDC I/P: 800 VDC I/P: 320 VDC O/P:TESTING Ta:25°C</p>	<p>118.1%/ 1400 VDC 117.3%/ 800 VDC 117.7%/ 320 VDC PROTECTION TYPE : Hiccup mode when output voltage&lt;35%, recovers</p>



		condition is removed; Constant current limiting, recovers automatically after fault condition is removed within 35% ~ 100% rated output voltage		automatically after condition is removed; Constant current limiting, recovers automatically after fault condition is removed within 35% ~ 100% rated output voltage
2	OVER VOLTAGE PROTECTION	CH: 40 V~ 48 V Protection type : Shut down o/p voltage, re-power on to recover	I/P: 1500VDC I/P: 800VDC I/P: 250VDC O/P:MIN LOAD Ta:25°C	43.6V/ 1500 VDC 43.6V/ 800 VDC 43.6V/ 250 VDC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	SPEC: NO DAMAGE Protection type : Hiccup mode, recovers automatically after fault condition is removed	I/P: 250VDC I/P: 1500VDC O/P:FULL LOAD	O.T.P Active PROTECTION TYPE : OK Hiccup mode, recovers automatically after fault condition is removed
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 250VDC I/P: 1500VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : OK Hiccup mode , recovers automatically after fault condition is removed °
5	DC INPUT UNDER VOLTAGE LOCKOUT	Under voltage protection range: 200 ~ 230Vdc , Under voltage release range: 230 ~ 245Vdc	I/P:TESTING O/P: TEST LOAD Ta:25°C	NO DAMAGE Under voltage protection range TEST: <u>214.5</u> Vdc , Under voltage release range TEST: <u>237.1</u> Vdc ,
6.	DC INPUT REVERSE POLARITY	By internal Bridge Diode, no damage, recovers automatically after fault condition removed	I/P: 1500 VDC O/P: FULL LOAD Ta:25°C	TEST: <u>OK</u> NO DAMAGE, recovers automatically after fault condition is removed °

### CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	30VDC/1A RESISTIVE LOAD Contact Close: DC OK Contact Open: DC Fail	I/P:800VDC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
2	CURRENT SHARING	Up to 960W(3+1 units)	I/P:800VDC O/P: (The rated current per unit) x (Number of unit) x 0.9 Ta:25°C	TEST: <u>OK</u>



### COMPONENT STRESS TEST

N O	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (C to E) Peak Voltage	Q1/Q2/Q3/Q4 Rated: 19 A/ 650V	DC ON/OFF I/P: High-Line +3V = 1503V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	Q1 VDS: (1) 498V (2) 514V (3) 510V (4) 506V (5) 510V (6) 514V (7) 506V  Q3 VDS: (1) 478V (2) 494V (3) 490V (4) 486V (5) 486V (6) 486V (7) 491V  Q2 VDS: (1) 478V (2) 494V (3) 490V (4) 486V (5) 490V (6) 482V (7) 484V  Q4 VDS: (1) 478V (2) 494V (3) 486V (4) 486V (5) 486V (6) 478V (7) 495V
2	Diode Peak Voltage	D140 Rated: 10A/ 400V	DC ON/OFF I/P: High-Line +3V =1503 V Vo=Vmax O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Vo=Vnormal O/P: (1) Full Load Ta:25°C	VDS: Vo=Vmax (1) 287V (2) 330V (3) 284V (4) 282V (5) 284V (6) 284V (7) 325V (8) 279V  Vo=Vnormal (1) 294V
3	Input Capacitor Voltage	C5/C6/C7/C8 Rated: 100 μ / 420 V	I/P: High-Line +3V = 1503V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4)Full load continue Ta:25°C	C5 (1) 379V (2) 379V (3) 379V (4) 379V  C6 (1) 379V (2) 379V (3) 379V (4) 379V  C7  C8



				(1) 379V (2) 379V (3) 379V (4) 379V	(1) 379V (2) 379V (3) 379V (4) 379V
4	Control IC Voltage Test	<p>PWM IC U1 Rated : 8.3V~ 28 V</p> <p>I/P IC U4 Rated : 6.5V~ 30V</p> <p>O/P IC U100 Rated : 3V~ 30V</p> <p>IC U101 Rated : 3V~30V</p>	<p>DC ON/OFF I/P: High-Line +3V = 1503V</p> <p>O/P:(1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin LOW LINE) Ta:25°C</p>	<p>U1/U4: (1) 20V (2) 20.2V (3) 17.4V (4) 20.2V (5) 20V</p> <p>U100/U101 (1) 13V (2) 7.2V (3) 7.2V (4) 23.9V (5) 13.2V</p>	
5	Clamp Diode Peak Voltage	<p>D1 / D2 / D3/ D4 Rated : 1000 V /1 A</p>	<p>I/P : High-Line +3V =1503 V</p> <p>DC ON/OFF</p> <p>O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue Ta : 25°C</p>	<p>D1: (1) 473V (2) 480V</p> <p>D3: (1) 484V (2) 478V</p>	<p>D2: (1) 477V (2) 470V</p> <p>D4: (1) 470V (2) 480V</p>

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	<p>I/P-O/P:4KVDC/min I/P-FG:3.75 KVDC/min O/P-FG:2KVDC/min O/P-DC OK: 0.5KVDC/min</p>	<p>I/P-O/P: 4.4KVDC/min I/P-FG: 4.125 KVDC/min O/P-FG:2.4KVDC/min O/P-DC OK: 0.6KVDC/min Ta:25°C</p>	<p>I/P-O/P: 4.86mA I/P-FG: 3.98mA O/P-FG: 3.03mA O/P-DC OK: 0.01mA NO DAMAGE</p>
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 600VDC Ta:25°C	I/P-O/P: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	3 mΩ

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	EN55032 CLASS A	I/P: 400 VDC/800VDC O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab



2	CONDUCTION	EN55032 CLASS A	I/P: 400 VDC/800VDC O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
3	E.S.D	EN61000-4-2 Level 3 8KV air Level 2 4KV contact ,	I/P: 400 VDC/800VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
4	E.F.T	EN61000-4-4 INPUT: 2KV	I/P: 400 VDC/800VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
5	SURGE	IEC61000-4-5 Vin+~Vin- :2KV Vin~FG:4KV	I/P: 400 VDC/800VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
6	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

## ■ RELIABILITY TEST

### ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL : RSDH-240-32 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 800 VDC O/P : FULL LOAD Ta= 25 °C 2. HIGH AMBIENT BURN-IN : HRS I/P : 800 VDC O/P : FULL LOAD Ta= 50 °C																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 25 °C</th> <th>HIGH AMBIENT Ta= 50 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>L1</td><td>37.3°C</td><td>63.9°C</td></tr> <tr><td>2</td><td>RTH1</td><td>48.6°C</td><td>71.7°C</td></tr> <tr><td>3</td><td>RTH3</td><td>28.8°C</td><td>56.1°C</td></tr> <tr><td>4</td><td>C10</td><td>40.9°C</td><td>67.8°C</td></tr> <tr><td>5</td><td>LF2</td><td>48.7°C</td><td>75.7°C</td></tr> <tr><td>6</td><td>LF3</td><td>51.0°C</td><td>78.2°C</td></tr> <tr><td>7</td><td>BD1</td><td>61.7°C</td><td>86.0°C</td></tr> <tr><td>8</td><td>C6</td><td>47.5°C</td><td>74.7°C</td></tr> <tr><td>9</td><td>C8</td><td>54.3°C</td><td>81.1°C</td></tr> <tr><td>10</td><td>ZNR6</td><td>55.3°C</td><td>82.5°C</td></tr> <tr><td>11</td><td>Q4</td><td>74.9°C</td><td>98.5°C</td></tr> <tr><td>12</td><td>Q3</td><td>77.1°C</td><td>104.7°C</td></tr> <tr><td>13</td><td>Q2</td><td>66.6°C</td><td>95.3°C</td></tr> <tr><td>14</td><td>Q1</td><td>65.1°C</td><td>83.4°C</td></tr> <tr><td>15</td><td>R49</td><td>62.5°C</td><td>90.5°C</td></tr> <tr><td>16</td><td>U1</td><td>65.4°C</td><td>92.8°C</td></tr> <tr><td>17</td><td>C71</td><td>57.2°C</td><td>85.3°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C	1	L1	37.3°C	63.9°C	2	RTH1	48.6°C	71.7°C	3	RTH3	28.8°C	56.1°C	4	C10	40.9°C	67.8°C	5	LF2	48.7°C	75.7°C	6	LF3	51.0°C	78.2°C	7	BD1	61.7°C	86.0°C	8	C6	47.5°C	74.7°C	9	C8	54.3°C	81.1°C	10	ZNR6	55.3°C	82.5°C	11	Q4	74.9°C	98.5°C	12	Q3	77.1°C	104.7°C	13	Q2	66.6°C	95.3°C	14	Q1	65.1°C	83.4°C	15	R49	62.5°C	90.5°C	16	U1	65.4°C	92.8°C	17	C71	57.2°C	85.3°C
NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C																																																																									
1	L1	37.3°C	63.9°C																																																																									
2	RTH1	48.6°C	71.7°C																																																																									
3	RTH3	28.8°C	56.1°C																																																																									
4	C10	40.9°C	67.8°C																																																																									
5	LF2	48.7°C	75.7°C																																																																									
6	LF3	51.0°C	78.2°C																																																																									
7	BD1	61.7°C	86.0°C																																																																									
8	C6	47.5°C	74.7°C																																																																									
9	C8	54.3°C	81.1°C																																																																									
10	ZNR6	55.3°C	82.5°C																																																																									
11	Q4	74.9°C	98.5°C																																																																									
12	Q3	77.1°C	104.7°C																																																																									
13	Q2	66.6°C	95.3°C																																																																									
14	Q1	65.1°C	83.4°C																																																																									
15	R49	62.5°C	90.5°C																																																																									
16	U1	65.4°C	92.8°C																																																																									
17	C71	57.2°C	85.3°C																																																																									





		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 25 °C</th> <th>HIGH AMBIENT Ta= 50 °C</th> </tr> </thead> <tbody> <tr><td>18</td><td>C56</td><td>56.3°C</td><td>84.4°C</td></tr> <tr><td>19</td><td>T3</td><td>47.4°C</td><td>76.7°C</td></tr> <tr><td>20</td><td>Q10</td><td>45.9°C</td><td>74.4°C</td></tr> <tr><td>21</td><td>U100</td><td>58.0°C</td><td>84.2°C</td></tr> <tr><td>22</td><td>U101</td><td>58.6°C</td><td>85.0°C</td></tr> <tr><td>23</td><td>C110</td><td>52.4°C</td><td>79.9°C</td></tr> <tr><td>24</td><td>C107</td><td>65.0°C</td><td>91.1°C</td></tr> <tr><td>25</td><td>D140</td><td>67.5°C</td><td>93.3°C</td></tr> <tr><td>26</td><td>D149</td><td>79.7°C</td><td>105.6°C</td></tr> <tr><td>27</td><td>J100</td><td>74.5°C</td><td>98.7°C</td></tr> <tr><td>28</td><td>T1coil</td><td>61.9°C</td><td>89.7°C</td></tr> <tr><td>29</td><td>T1core</td><td>66.1°C</td><td>93.4°C</td></tr> <tr><td>30</td><td>T2 coil</td><td>69.1°C</td><td>97.7°C</td></tr> <tr><td>31</td><td>T2 core</td><td>68.7°C</td><td>97.3°C</td></tr> <tr><td>32</td><td>U2</td><td>53.3°C</td><td>80.5°C</td></tr> <tr><td>34</td><td>C111</td><td>45.4°C</td><td>72.2°C</td></tr> <tr><td>35</td><td>C1</td><td>35.5°C</td><td>62.8°C</td></tr> <tr><td>36</td><td>LF100</td><td>53.5°C</td><td>80.9°C</td></tr> <tr><td>37</td><td>TSW1</td><td>54.2°C</td><td>82.0°C</td></tr> <tr><td>38</td><td>C15</td><td>64.4°C</td><td>92.2°C</td></tr> <tr><td>39</td><td>Q11</td><td>59.2°C</td><td>86.3°C</td></tr> <tr><td>40</td><td>D10</td><td>63.0°C</td><td>91.1°C</td></tr> <tr><td>41</td><td>R111</td><td>79.4°C</td><td>107.8°C</td></tr> <tr><td>42</td><td>C125</td><td>66.6°C</td><td>89.5°C</td></tr> </tbody> </table>				NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C	18	C56	56.3°C	84.4°C	19	T3	47.4°C	76.7°C	20	Q10	45.9°C	74.4°C	21	U100	58.0°C	84.2°C	22	U101	58.6°C	85.0°C	23	C110	52.4°C	79.9°C	24	C107	65.0°C	91.1°C	25	D140	67.5°C	93.3°C	26	D149	79.7°C	105.6°C	27	J100	74.5°C	98.7°C	28	T1coil	61.9°C	89.7°C	29	T1core	66.1°C	93.4°C	30	T2 coil	69.1°C	97.7°C	31	T2 core	68.7°C	97.3°C	32	U2	53.3°C	80.5°C	34	C111	45.4°C	72.2°C	35	C1	35.5°C	62.8°C	36	LF100	53.5°C	80.9°C	37	TSW1	54.2°C	82.0°C	38	C15	64.4°C	92.2°C	39	Q11	59.2°C	86.3°C	40	D10	63.0°C	91.1°C	41	R111	79.4°C	107.8°C	42	C125	66.6°C	89.5°C
NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C																																																																																																						
18	C56	56.3°C	84.4°C																																																																																																						
19	T3	47.4°C	76.7°C																																																																																																						
20	Q10	45.9°C	74.4°C																																																																																																						
21	U100	58.0°C	84.2°C																																																																																																						
22	U101	58.6°C	85.0°C																																																																																																						
23	C110	52.4°C	79.9°C																																																																																																						
24	C107	65.0°C	91.1°C																																																																																																						
25	D140	67.5°C	93.3°C																																																																																																						
26	D149	79.7°C	105.6°C																																																																																																						
27	J100	74.5°C	98.7°C																																																																																																						
28	T1coil	61.9°C	89.7°C																																																																																																						
29	T1core	66.1°C	93.4°C																																																																																																						
30	T2 coil	69.1°C	97.7°C																																																																																																						
31	T2 core	68.7°C	97.3°C																																																																																																						
32	U2	53.3°C	80.5°C																																																																																																						
34	C111	45.4°C	72.2°C																																																																																																						
35	C1	35.5°C	62.8°C																																																																																																						
36	LF100	53.5°C	80.9°C																																																																																																						
37	TSW1	54.2°C	82.0°C																																																																																																						
38	C15	64.4°C	92.2°C																																																																																																						
39	Q11	59.2°C	86.3°C																																																																																																						
40	D10	63.0°C	91.1°C																																																																																																						
41	R111	79.4°C	107.8°C																																																																																																						
42	C125	66.6°C	89.5°C																																																																																																						
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 800 VDC O/P : 117%LOAD Ta : 25°C	TEST : OK																																																																																																					
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 250 VDC / 1500 VDC O/P : 100 %LOAD Ta= -5 °C O/P : 50%LOAD Ta= -45 °C	TEST : OK																																																																																																					
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 1500 VDC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																					
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~50°C)	I/P : 800 VDC O/P : FULL LOAD	± 0.0011 %/°C(0~50°C)																																																																																																					
6	STORAGE TEMPERATURE TEST	-40~80°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC																																																																																																						



240W High Reliable 250~1500Vdc Ultra Wide  
Input DIN Rail Type DC-DC Converter

**DDRH-240 series**

7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle: 800 VDC / FULL LOAD DC ON 3sec/DC OFF 1sec TEST 1cycle: 800 VDC / FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 800VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 800VDC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 800VDC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 800VDC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 244593.4HRS (2) 39512.6HRS (3) 73979HRS (4) 122237.4HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1391.8K hrs min. Telcordia SR-332 (Bellcore) ; 214.2K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 800VDC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009