



# Test Report: NLDD-700H

---

DC-DC Constant Current Step-Down LED driver

## ■ DESIGN VERIFY TEST

Output Function Test  
Input Function Test  
Protection Function Test  
Control Function Test  
Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test  
E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST

## DESIGN VERIFY TEST



### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																							
1	CURRENT ACCURACY	-5%~+5%	I/P: 48VDC O/P: LED max/ LED min Ta:25°C	-2.71%~ 0.142%/48VDC																																							
2	CURRENT RIPPLE	-5%~ +5%	I/P: 48VDC O/P: LED min~ LED max Ta:25°C	3.67%~ 1.73%/48VDC																																							
3	SUGRE CURRENT	< +10%	I/P: 48VDC O/P: LED max/ LED min Ta:25°C	4.29%~ 5.43%/48VDC																																							
4	VOLTAGE RANGE	6~52VDC	I/P: 10- 56VDC O/P:TEST Ta:25°C	6-52VDC																																							
5	DIMMING OPERATION	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><b>PWM Dimming Control</b></p> </div> <div style="width: 45%;"> <ul style="list-style-type: none"> <li>⊙ Short circuit PWM PIN can realize dimming turn off.</li> <li>⊙ During PWM dimming operation, the output current will change to PWM style.</li> </ul> </div> </div> <p>I/P : 48 VDC O/P : DIMMING TEST</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>PWM</th> <th>0%</th> <th>10%</th> <th>20%</th> <th>30%</th> <th>40%</th> <th>50%</th> <th>60%</th> <th>70%</th> <th>80%</th> <th>90%</th> <th>100%</th> <th>OPEN</th> </tr> </thead> <tbody> <tr> <td>Output Current (100Hz)</td> <td>0</td> <td>0.068</td> <td>0.136</td> <td>0.205</td> <td>0.273</td> <td>0.342</td> <td>0.410</td> <td>0.478</td> <td>0.547</td> <td>0.615</td> <td>0.684</td> <td>0.687</td> </tr> <tr> <td>%</td> <td>0</td> <td>9.71</td> <td>19.43</td> <td>29.29</td> <td>39.00</td> <td>48.86</td> <td>58.57</td> <td>68.29</td> <td>78.14</td> <td>87.86</td> <td>97.71</td> <td>98.14</td> </tr> </tbody> </table> <p>TEST RESULT : OK</p>			PWM	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN	Output Current (100Hz)	0	0.068	0.136	0.205	0.273	0.342	0.410	0.478	0.547	0.615	0.684	0.687	%	0	9.71	19.43	29.29	39.00	48.86	58.57	68.29	78.14	87.86	97.71	98.14
PWM	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN																															
Output Current (100Hz)	0	0.068	0.136	0.205	0.273	0.342	0.410	0.478	0.547	0.615	0.684	0.687																															
%	0	9.71	19.43	29.29	39.00	48.86	58.57	68.29	78.14	87.86	97.71	98.14																															

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	10VDC~ 56VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	9.8~ 59VDC
			I/P: LOW-LINE-0.2VDC= 9.8 VDC HIGH-LINE+3VDC= 59VDC O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN ( POWER ON/OFF NO DAMAGE )	TEST(1) <u>OK</u> (2) <u>OK</u> (3) <u>OK</u>
2	INPUT CURRENT(TYP)	700mA @48VDC*FULL LOAD 5mA @48VDC*NO LOAD	I/P:48 VDC O/P:FULL LOAD/NO LOAD Ta:25°C	I =645mA/VDC(FULL LOAD) I =1.46mA/VDC(NO LOAD)
3	EFFICIENCY(TYP)	96%	I/P: 36/48VDC O/P:FULL LOAD Ta:25°C	96.96%/48 VDC 96.29%/36 VDC

EFFICIENCY vs LOAD

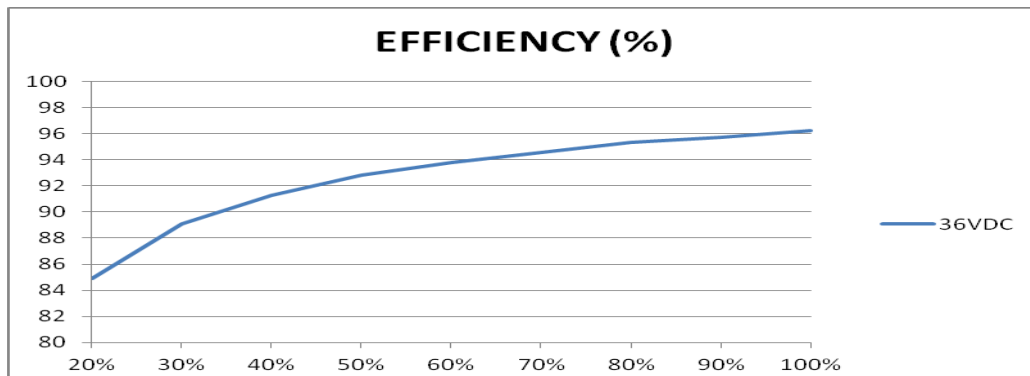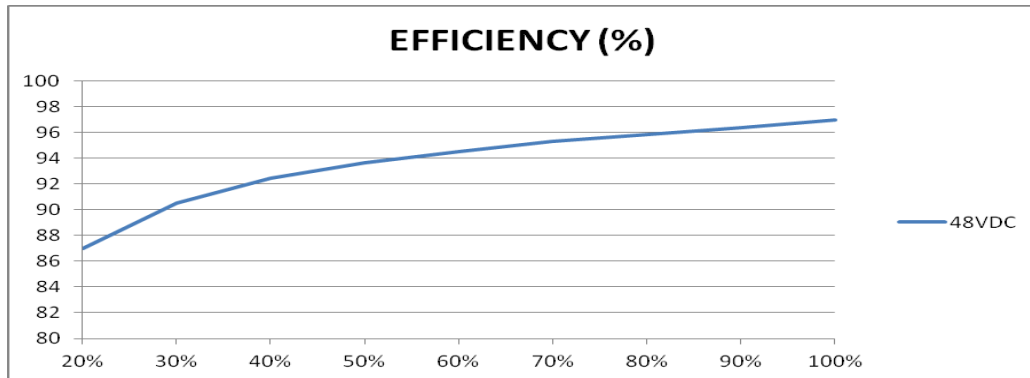

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 48VDC O/P:FULL LOAD	PROTECTION TYPE : Shut down, recovers Automatically after temperature goes down
2	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 10VDC/48VDC/56VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE OK PROTECTION TYPE : Can be continued , recovers automatically after fault condition is removed

**CONTROL FUNCTION TEST**

1	REMOTE CONTROL	1. Power ON with dimming: DIM ~ -Vin >2.5 ~ 6VDC or open circuit 2. Power OFF : DIM ~ -Vin < 0.8VDC or short	I/P: 10VDC/24 VDC /56 VDC O/P:FULL LOAD	IP:10DC 1、 Power OFF: <1.66VDC Power ON: >1.99VDC IP:24DC 2、 Power OFF: <1.68VDC Power ON: >1.99 VDC IP:59DC 3、 Power OFF: <1.75VDC Power ON: >1.98VDC
2	QUIESCENT INPUT CURRENT IN SHUTDOWN MODE(max.)	2mA at PWM dimming OFF and 24VDC input	I/P: 24 VDC O/P:FULL LOAD	1.24mA

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (C to E) Peak Voltage	U1 Rated MBI6662 2A/ 75V	DC ON/OFF  I/P:High-Line +3 VDC =59 VDC VDS: O/P: (1) CV max (2) CV max continue (3) CV min (4)Output Short (5)NO LOAD (6)DIM off  I/P:Low-Line -0.2 VDC =9.8 VDC O/P: (1) CV max (2) CV max continue (3) CV min (4)Output Short (5)NO LOAD (6)DIM off Ta:25°C	VDS: 59V  (1) 60.9V (2) 60.5V (3) 60.5V (4) 60.5V (5) 60.1V (6) 59.3V  VDS: 9.8V (1) 11.60V (2) 10.09V (3) 10.73V (4) 10.65V (5) 9.290V (6) 10.09V

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	EN55015 CLASS A	I/P: 56VDC O/P:FULL LOAD Ta:25°C	PASS
2	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P: 56VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
3	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 0.5KV	I/P: 56VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
4	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

**RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																								
1	TEMPERATURE RISE TEST	MODEL : NLDD-1050HW 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 48VDC O/P : FULL LOAD Ta= 28.4°C 2. HIGH AMBIENT BURN-IN : HRS I/P : 56VDC O/P : FULL LOAD Ta= 51.7 °C																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=28.4 °C</th> <th>HIGH AMBIENT Ta=51.7 °C</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>U1</td> <td>47.3°C</td> <td>80.9°C</td> </tr> <tr> <td>2</td> <td>C1</td> <td>42.4°C</td> <td>69.9°C</td> </tr> <tr> <td>3</td> <td>D2</td> <td>45.7°C</td> <td>73.0°C</td> </tr> <tr> <td>4</td> <td>L1</td> <td>46.1°C</td> <td>74.2°C</td> </tr> <tr> <td>5</td> <td>TC</td> <td>39.2°C</td> <td>69.5°C</td> </tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=28.4 °C	HIGH AMBIENT Ta=51.7 °C	1	U1	47.3°C	80.9°C	2	C1	42.4°C	69.9°C	3	D2	45.7°C	73.0°C	4	L1	46.1°C	74.2°C	5	TC	39.2°C	69.5°C
NO	Position	ROOM AMBIENT Ta=28.4 °C	HIGH AMBIENT Ta=51.7 °C																									
1	U1	47.3°C	80.9°C																									
2	C1	42.4°C	69.9°C																									
3	D2	45.7°C	73.0°C																									
4	L1	46.1°C	74.2°C																									
5	TC	39.2°C	69.5°C																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 10VDC / 56VDC O/P : FULL LOAD Ta= -45 °C	TEST : OK																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 56VDC O/P : FULL LOAD Ta= 55°C HUMIDITY= 95 %R.H	TEST : OK																								
4	TEMPERATURE COEFFICIENT	+ 0.03%/°C(0~50°C)	I/P : 56VDC O/P : FULL LOAD	+ 0.001 %/°C(0~50°C)																								

6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle: 56VDC / FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle: 56VDC / FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C1 IS THE MOST CRITICAL COMPONENT (1) I/P : 48VDC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 56VDC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 56VDC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 56VDC O/P : 50% LOAD Ta=50 °C LIFE TIME	(1) 729024HRS (2) 131582HRS (3) 70911HRS (4) 59044HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 29984.3K hrs min. Telcordia SR-332 (Bellcore); 2881.6K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 56VDC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/HUANGMK	WENF	LINKX